

378
378M

Panic Exit Hardware

Introduction

Part of the Briton 376 series, the 378 reversible rim panic latch is compliant to EN 1125 standard and suitable for both timber and metal door installations. Designed to satisfy the requirements for panic and emergency exit applications this reliable exit solution is site reversible for left- and right-hand applications.

NOTE: The most important consideration when specifying panic exit hardware is who might be in the building in the event of an emergency.



378.SE

Features & Functions

- For single doors and double rebated doors when used in combination with 376 panic bolt and double door strike.
- Products designed to satisfy panic exit applications or emergency exit applications
- Suitable for use on fire & smoke doors up to 1300mm wide
- Site reversible - easy to hand on site
- Rim panic latch with single point latching
- Tubular steel cross bar can be cut on-site to suit door width
- Tested in excess of 200,000 cycles
- All versions supplied with fixings and self-adhesive "Push Bar to Open" signage
- Options include manual hold-open (dogging)



UK
CA

CE

certifire

2hr
TIMBER

4hr
STEEL

EPD

GUARANTEE
5
YEARS

Certification

UKCA Marked to EN 1125 (1121-CPR-UK-AAA7569)

CE Marked to EN 1125 (2812-CPR-AAA011)

Certifire Approved (CF5506)

Fire tested to EN 1634-1 for use on fire doors up to 2hr timber / 4hr steel

Environmental Product Declaration in accordance with ISO 14025 and EN 15803



DoP available at www.britondops.co.uk

Panic Exit Latch Briton 378

Product features	Product references		
	378	378M	
UKCA & CE marked	■	■	■ Standard
Panic exit device to EN 1125	■	■	□ Available as an option/variant
Emergency exit device to EN 179	■	■	
Device type	Push bar	Push bar	
Locking points	Single point rim latch	Single point rim latch	
Suitable for timber or metal doors	Timber	Metal	
Suitable for single doors	■	■	
Suitable for double door combinations	✱	✱	
Min. / Max. door width (per leaf)	665mm/1300mm	665mm/1300mm	
Push bar cut on site	■	■	
Site reversible	■	■	
Dogged hold-open facility	□	□	
Finishes available	SE, SS*, PB*, PS*	SE, SS*, PB*, PS*	
CE Classification	376B1322AA	376B1322AA	

✱ Used in combination with Briton 376 vertical bolt device on rebated double doors where the 378 rim latch is fitted to the first opening leaf.

Briton 378 Panic Rim Latch

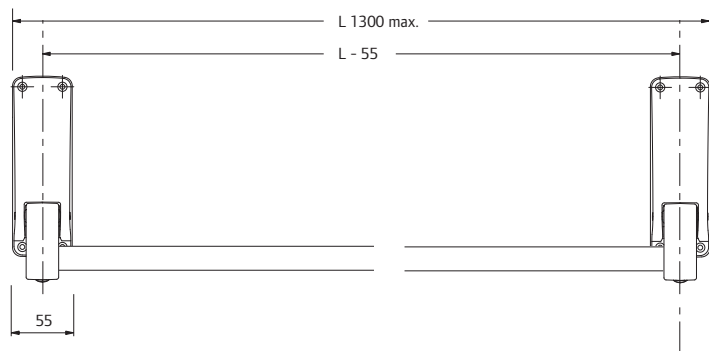

Door sizes

All products are suitable for use on doors up to 2500mm high x 1300mm wide. Minimum width of stiles 78mm for 13mm rebates and 90mm for 25mm rebates. For doors with less than 665mm clear opening width please seek advice from Technical Support on 0800 834102.

For Briton 379.N, 379.NA & 379.ND minimum door thickness is 40mm and minimum width of stile is 88mm.

All dimensions are in mm

Finishes

Available in sprayed silver and PVD plated finishes.

