



Application

The 1000 Series lock provides fully mechanical pushbutton access control with no electrical wiring, electronics, or batteries. Exterior access is by combination. Egress is by interior knob and is free at all times.

1000 Series locksets are the best choice for limiting access to high-traffic, security-sensitive areas in commercial, institutional, residential, and industrial buildings. These locks are ideal for locations with a high personnel turnover rate such as data processing centers, employee entrances, R&D labs, apartments, dormitories, and restricted areas in hospitals and airports.

The pushbutton design eliminates problems associated with the issue, control, and collection of keys and magnetic cards. The combination can be quickly and easily changed to ensure continued maximum security once employees, tenants, or guests leave, saving the cost of new keys, key cylinders, magnetic cards, and card-encoding devices.

Features

One-hand operation: Depress the buttons in the correct sequence to unlock the dead-locking latch.

Thousands of possible combinations: Authorized individuals can change the combination in seconds. One or all five buttons can be used in the combination with two or more buttons depressed simultaneously.

Easy to install on wood or metal doors: The lock retrofits cylindrical and tubular lockset with 2³/₄" (70 mm) backset. An inside trim plate adds to the ease of installation and aesthetic appeal.

Rugged & weather resistant: The lock is wear-tested for intensive use.

Includes: Standard strikes, installation instructions, full-scale template, combination change access key.

Optional Features

Key override: Can be used to override the lock combination and gain access using a key. This feature allows facilities to initiate or maintain a master-keyed security system (keyed alike or keyed differently). The lock accepts removable core cylinders (not supplied except with "XB" models).

Passage: Allows access without using the lock entry code, keeping the door unlocked even while closed. This feature is activated from the inside with a thumbturn or key (included with all passage feature models).

Specifications

Construction: Heavy-duty cylindrical lock housing; conforms to ANSI 156.2 Grade 1; cast front housing; brass unified trim plate; fixed cast or wrought brass knobs

Door thickness: 1³/₈" (35 mm) to 2¹/₄" (57 mm)

Strike: T strike plate; ASA strike plate; DB strike box

Backset: 2³/₄" (70 mm) backset

Installation: ASA 161 door preparation with additional through bore holes required: (1) 1" diameter for combination change, (2) 1/4" for mounting, and (1) 1" diameter for optional passage feature.


Handing: Factory-handed left; field reversible

Control: DF59 keys for combination change; DF5 keys for passage feature

Finishes: 03 (605) "Chiara" Bright Brass; 05 (609) Antique Brass; 026 (625) Bright Chrome; 26D (626) Satin Chrome

Weight: 7.25 lb. (3.3 kg)

Dimensions

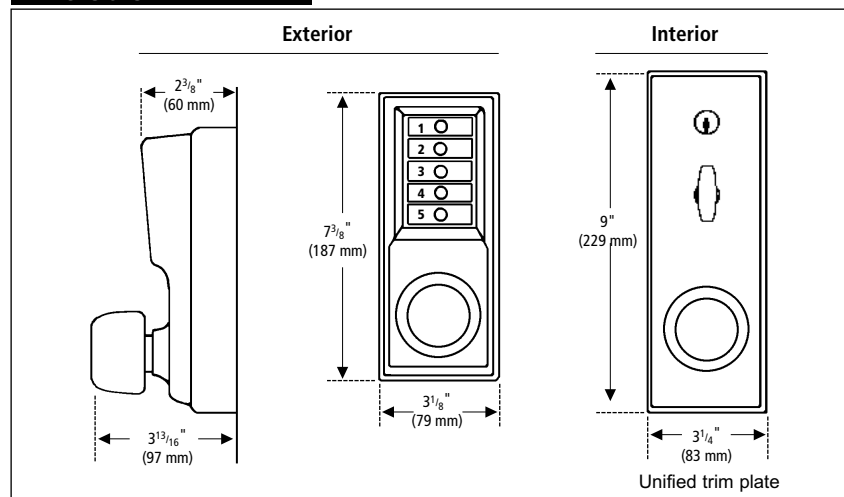

45 Assembly Street Edinburgh EH6 7BQ
Tel: 0131 555 0909 Fax: 0131 554 1177
 Email: sales@keyprint.co.uk
 Website: www.keyprint.co.uk


Ordering Information

Example

Model 1021 with 5/8" (16 mm) floating front throw latch, Best & Compatibles key override, Satin Chrome finish, packaged 1 per box



Build the part number with the features you require:

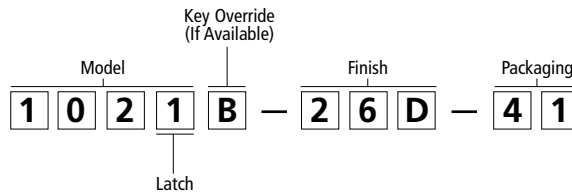

Model	Description	Key override feature	Passage feature	Lockout feature
1011	1000 Series cylindrical lockset			
1021	1000 Series cylindrical lockset	•		
1031	1000 Series cylindrical lockset		•	
1041	1000 Series cylindrical lockset	•	•	

Latch	Description
1	5/8" (16 mm) floating front throw latch; UL/ULC 3-hour fire rating
2	1/2" (13 mm) floating front throw latch; UL/ULC 3-hour fire rating
5	3/4" (19 mm) beveled front throw latch; UL/ULC 3-hour fire rating

Key override*	Description
A	ASSA
B	Best & Compatibles (6 or 7 pin length)
C	Corbin / Russwin
D	Dominion Lock
M	Medeco** / Yale (6 pin length)
R	Sargent
S	Schlage
XB	Best & Compatibles (core included)

* Accepts removable core cylinders (not supplied).
 ** 5-pin Medeco cylinder requires a special knob spacer. Request spacer when ordering, part number 201569 (supplied free of charge).

Finish	Description
03	"Chiara" Bright Brass (605)
05	Antique Brass (609)
026	Bright Chrome (625)*
26D	Satin Chrome (626)

* Available for models 1011 and 1021 only.

Packaging	Description
41	1 per box

